

# New light particle searches with PADME

Kalina Dimitrova  
Faculty of Physics, Sofia University

Workshop at 1GeV scale: From mesons to axions



19-20.09.2024  
Krakow, Poland



\* partially supported by **BNSF: KP-06-D002\_4/15.12.2020** within **MUCCA, CHIST-ERA-19-XAI-009**





# Outline

- The PADME Experiment: detectors and data taking
- PADME Run I and Run II
  - Results on  $e^+e^- \rightarrow \gamma\gamma$  cross section
- PADME Run III
  - Setup and strategy for X17 search
  - Signal and event selection
  - Sensitivity estimation
- Towards PADME Run IV

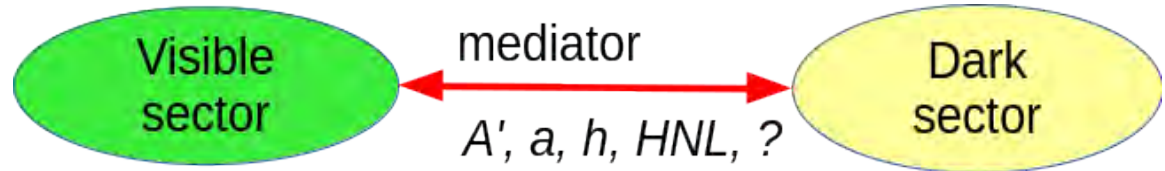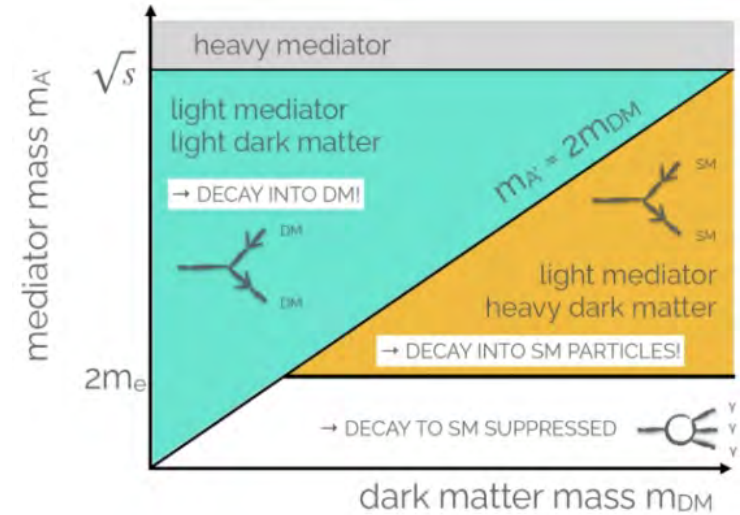

# Positron annihilation into new light particles

*Associated production:  $e^+ e^- \rightarrow A' \gamma$*

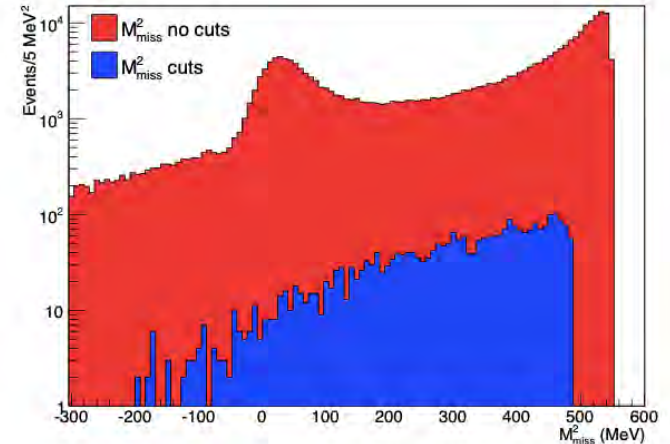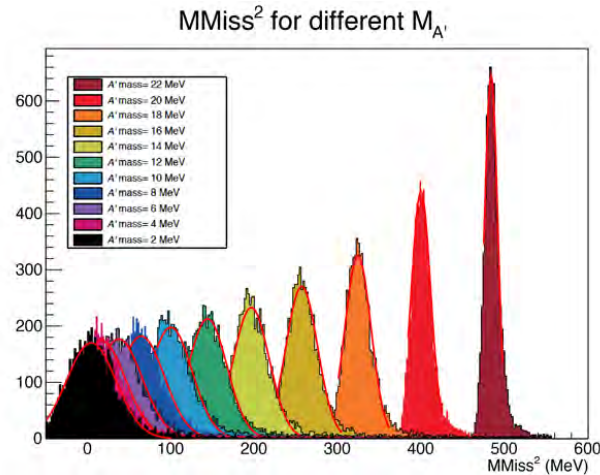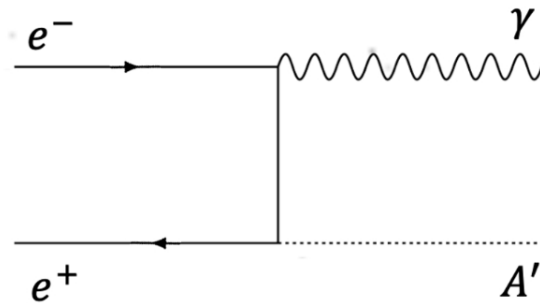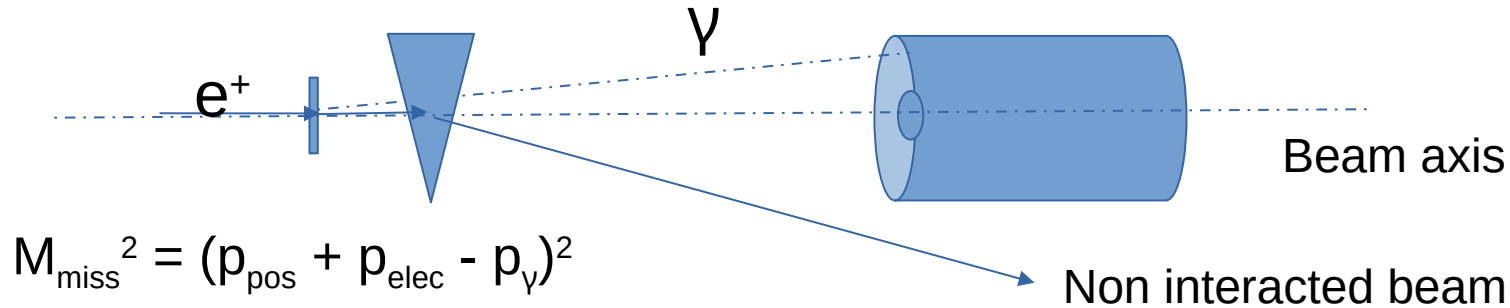


# The PADME technique

Small scale experiment @ Frascati Beam Test Facility

Combination of fixed target and collider techniques


Annihilation of accelerated antiparticles with matter

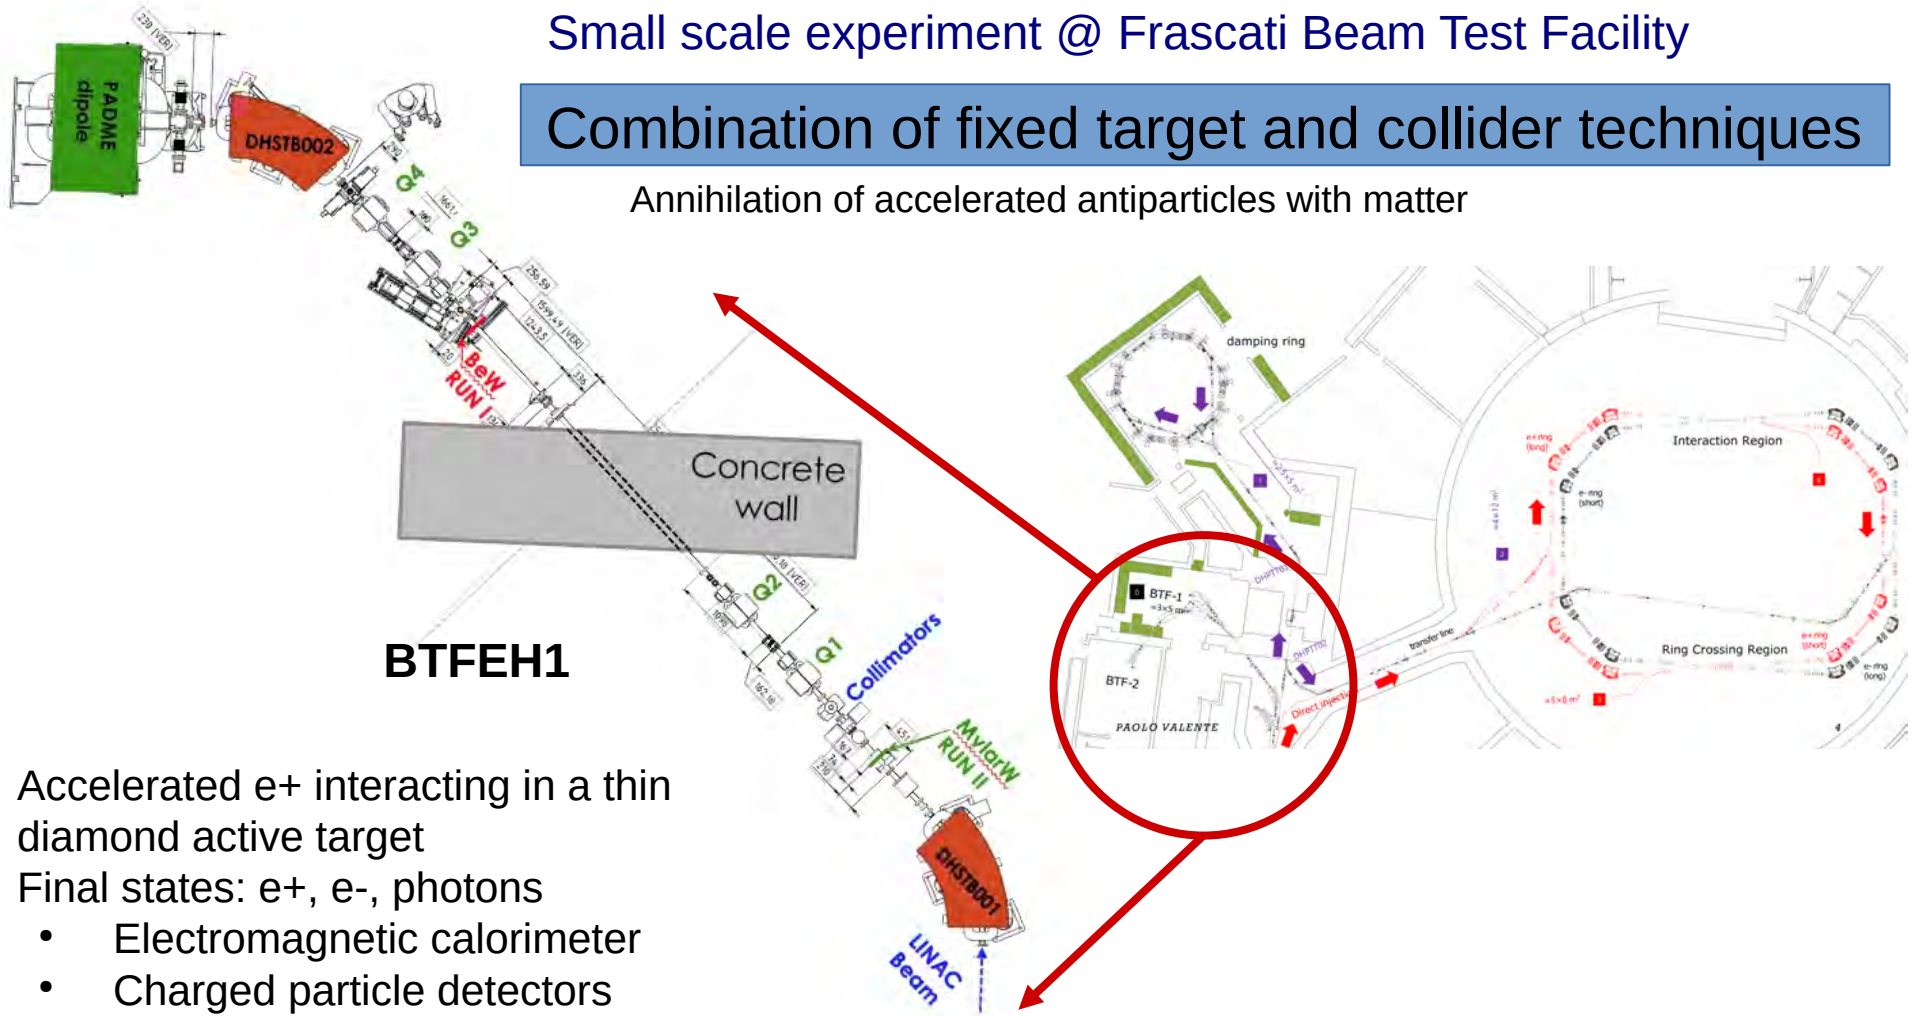


- Accelerated  $e^+$  interacting in a thin diamond active target
- Final states:  $e^+$ ,  $e^-$ , photons
  - Electromagnetic calorimeter
  - Charged particle detectors

# PADME Experiment

Mimosa beam monitor  
(LNF)



Active target  
(Lecce & University  
Salento)

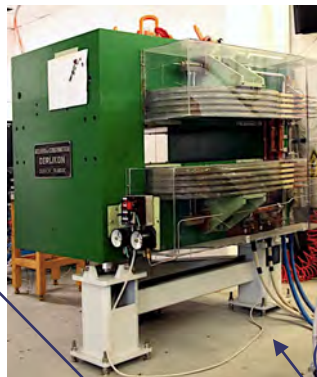


Dipole magnet  
(CERN TE/NSC-MNC)





C-fiber window

BGO calorimeter  
(Roma, Cornell U.,  
LNF, LE)

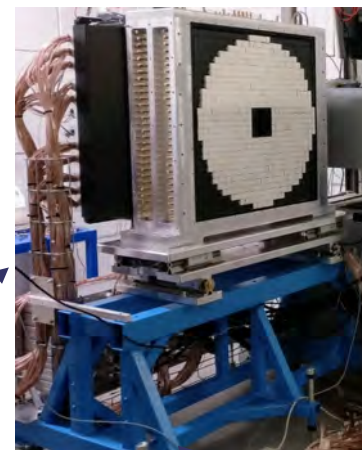

Veto scintillators  
(University of Sofia, Roma)

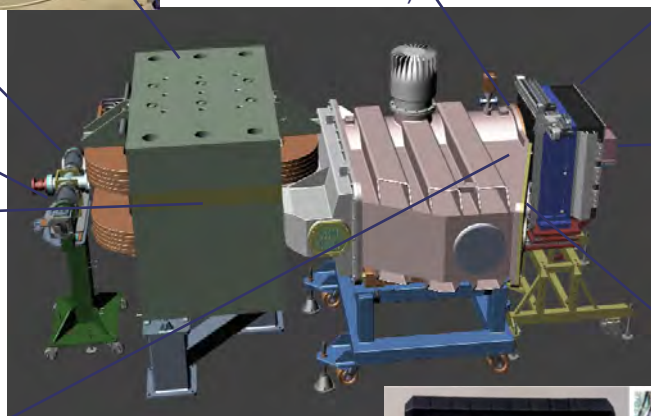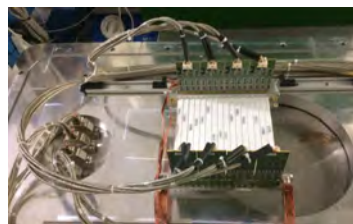

← 1m →




PbF<sub>2</sub> calorimeter  
(MTA Atomki, Cornell  
U., LNF)

TimePIX3 array  
(ADVACAM, LNF)









# Active target

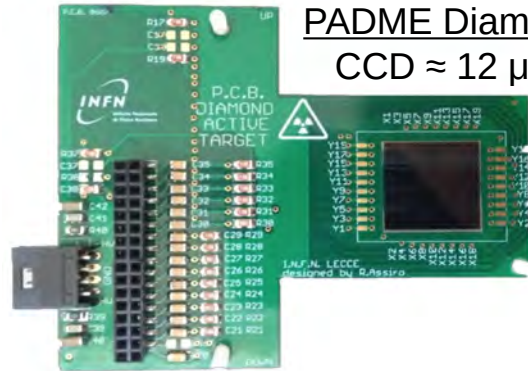

PADME Diamond  
CCD  $\approx 12 \mu\text{m}$

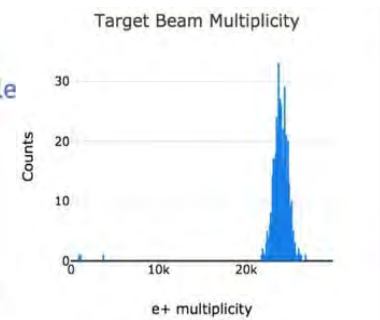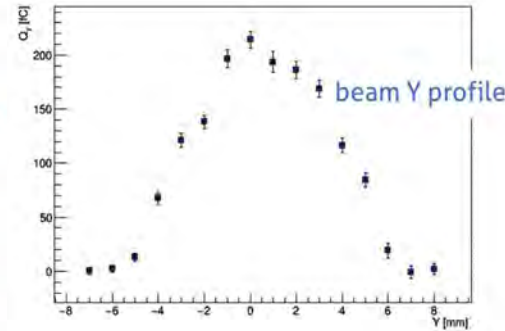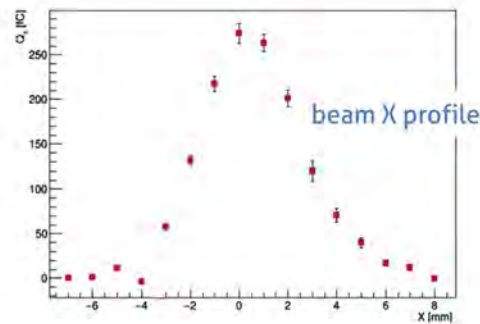


NPOT from target in reconstruction

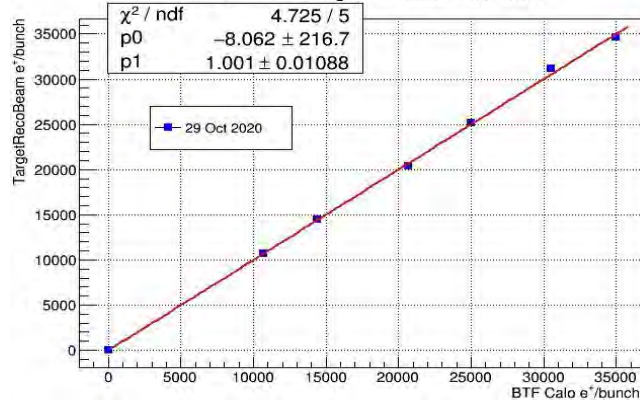



- Polycrystalline diamond
- 100  $\mu\text{m}$  thickness:
- $16 \times 1 \text{ mm}$  strip and X-Y readout in a single detector
- Graphite electrodes using excimer laser

Spatial resolution

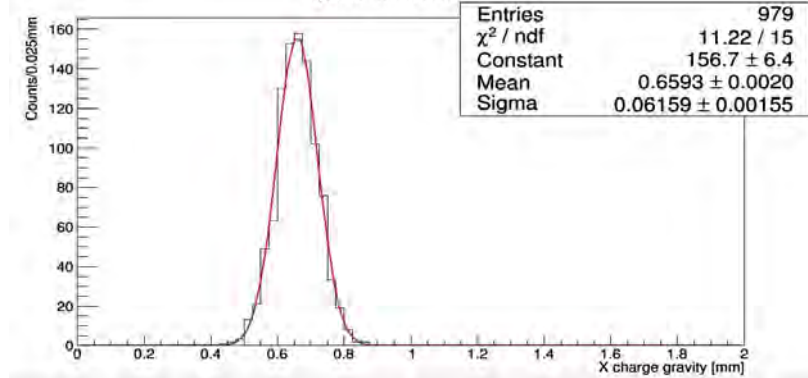

- JINST 12 (2017) 02, C02036

# Calorimeters

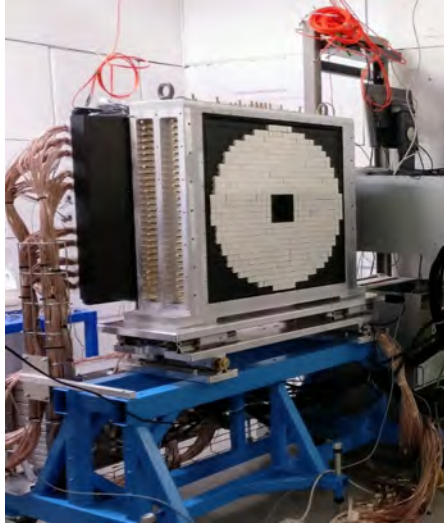


## ECAL: The heart of PADME

- 616 BGO crystals,  $2.1 \times 2.1 \times 23 \text{ cm}^3$
- BGO covered with diffuse reflective  $\text{TiO}_2$  paint
- additional optical isolation: 50 – 100  $\mu\text{m}$  black tedlar foils


Calibration at several stages:

- BGO + PMT equalization with  $^{22}\text{Na}$  source before construction
- Cosmic rays calibration using the MPV of the spectrum
- Temperature monitoring

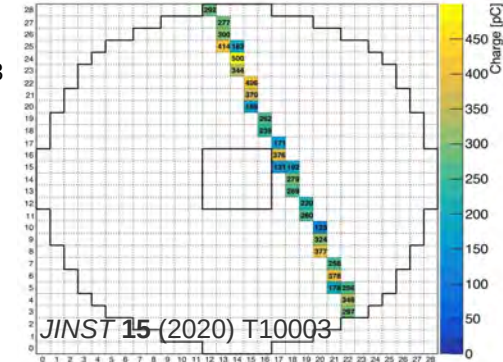


## Small Angle Calorimeter (SAC)

- 25 crystals - 5 x 5 matrix, Cherenkov  $\text{PbF}_2$
- Dimensions of each crystal:  $3 \times 3 \times 14 \text{ cm}^3$
- 50 cm behind ECAL
- PMT readout: Hamamatsu R13478UV with custom dividers
- Angular acceptance:  $[0, 19] \text{ mrad}$

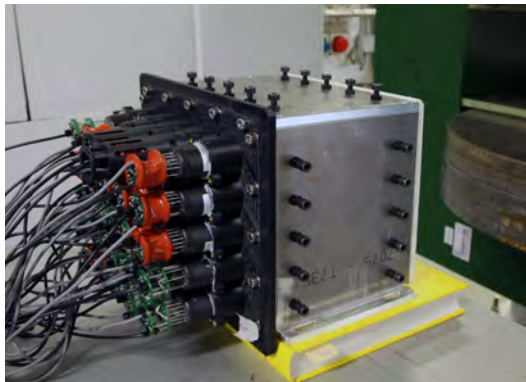



## Recorded bunch

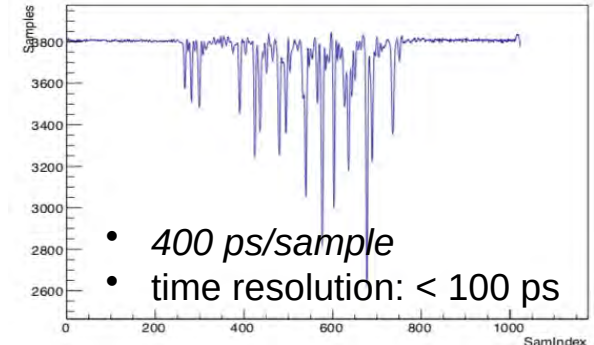

# Charged particle detectors



- Three sets of detectors detect the charged particles from the PADME target (at  $E_{\text{beam}} = 550$  MeV):
  - **PVeto**: positrons with  $50 \text{ MeV} < p_{e^+} < 450 \text{ MeV}$
  - **HEPVeto**: positrons with  $450 \text{ MeV} < p_{e^+} < 500 \text{ MeV}$
  - **EVeto**: electrons with  $50 \text{ MeV} < p_{e^+} < 450 \text{ MeV}$
- 96 + 96 (90) + 16 (x2) scintillator-WLS-SiPM RO channels
- Segmentation provides momentum measurement down to  $\sim 5$  MeV resolution

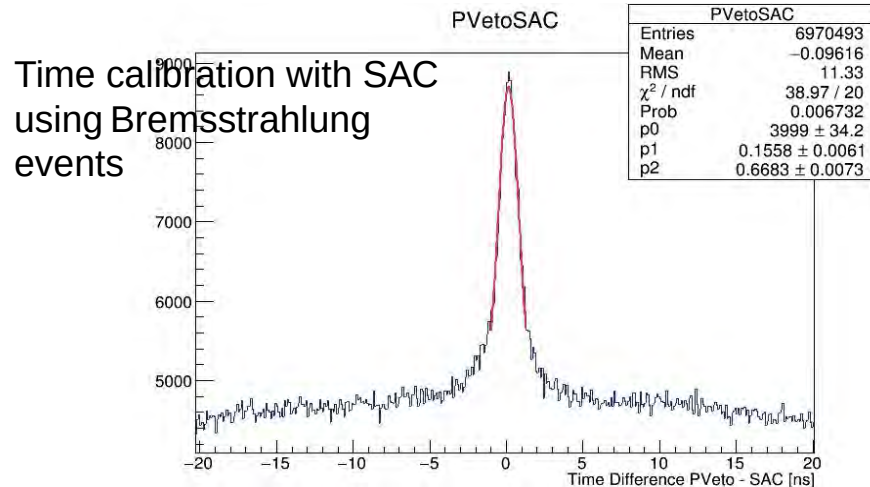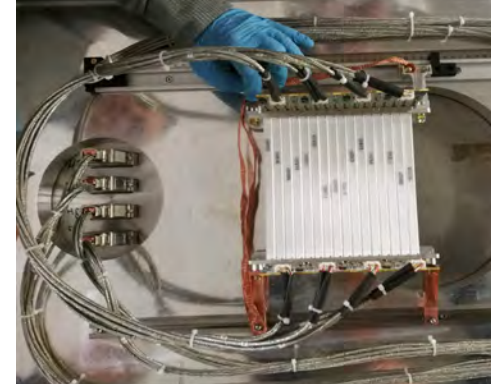

- Custom SiPM electronics, Hamamatsu S13360 3 mm, 25 $\mu\text{m}$  pixel SiPM
- Differential signals to the controllers, HV, thermal and current monitoring




JINST 19 (2024) 01, C01051

- Online time resolution:  $\sim 2$  ns
- Offline time resolution after fine  $T_0$  calculation – better than 1 ns



# Main background processes

- **Bremsstrahlung in the field of the target nuclei**
  - Photons mostly @ low energy, background dominates the high missing masses
  - An additional lower energy positron that could be detected due to stronger deflection
- **2 photon annihilation**
  - Peaks at  $M_{\text{miss}} = 0$
  - Quasi symmetric in gamma angles for  $E_\gamma > 50 \text{ MeV}$
- **3 photon annihilation**
  - Symmetry is lost – decrease in the vetoing capabilities
- **Radiative Bhabha scattering**
  - Topology close to bremsstrahlung

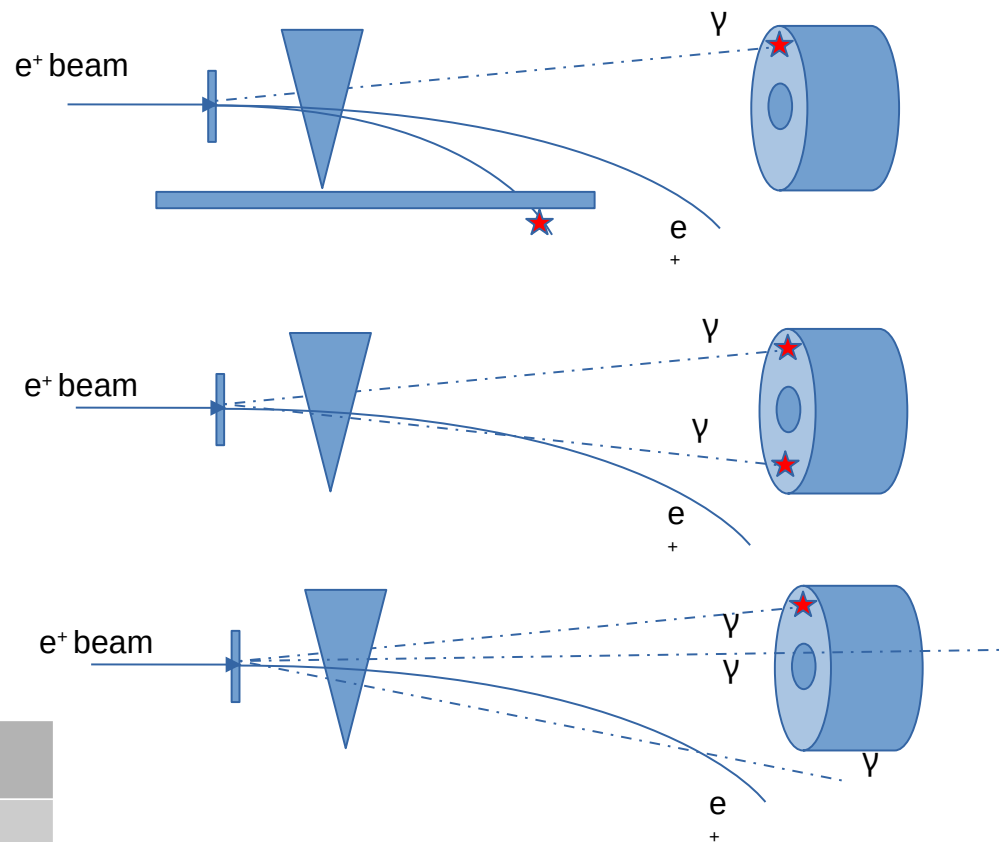

Background process	Cross section $e^+@550 \text{ MeV beam}$	Comment <i>Carbon target</i>
$e^+e^- \rightarrow \gamma\gamma$	1.55 mb	
$e^+ + N \rightarrow e^+ N \gamma$	4000 mb	$E_\gamma > 1\text{MeV}$
$e^+e^- \rightarrow \gamma\gamma\gamma$	0.16 mb	CalcHEP, $E_\gamma > 1\text{MeV}$
$e^+e^- \rightarrow e^+e^-\gamma$	180 mb	CalcHEP, $E_\gamma > 1\text{MeV}$





# PADME RUN I and II

## Run I and PADME commissioning

- started in Autumn 2018 and ended on February 25<sup>th</sup>
  - $\sim 7 \times 10^{12}$  PoT recorded with secondary beam
  - PADME DAQ, Detector, beam, collaboration commissioning
  - Data quality and detector calibration
- PADME test beam data
  - July 2019, few days of valuable data
    - Certification of the primary beam
  - Detector performance/calibration checks
  - Primary beam with  $E_{\text{beam}} = 490$  MeV


## RUN II: primary beam

- July 2020
  - New environment/detector parameter monitoring and control system
  - Remote operation confirmation
- Autumn 2020:
  - A long data taking period with  $O(5 \times 10^{12})$   $e^+$  on target
  - $E_{\text{beam}} = 430$  MeV

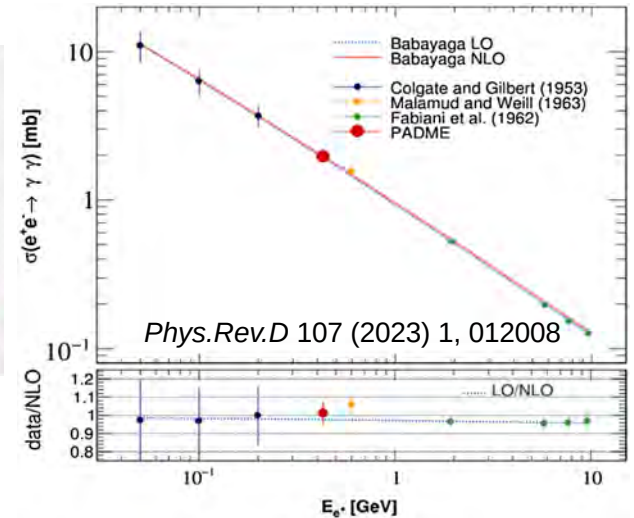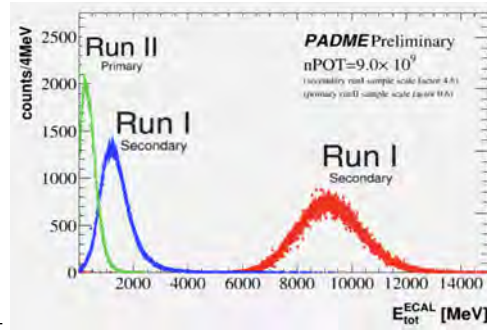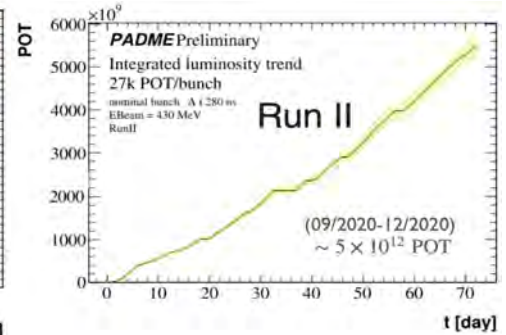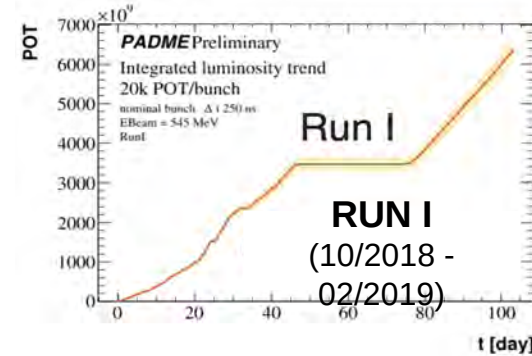


# ML for double particle separation in ECal








PADME ECal





Two photon showers in the ECal




- AI to identify the number of pulses in a waveform
- Simple output – up to five pulses
- Trained on 100 000 events

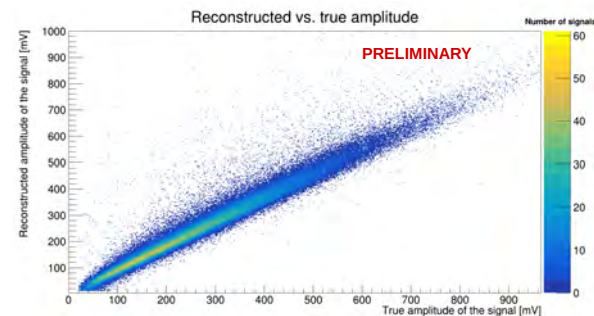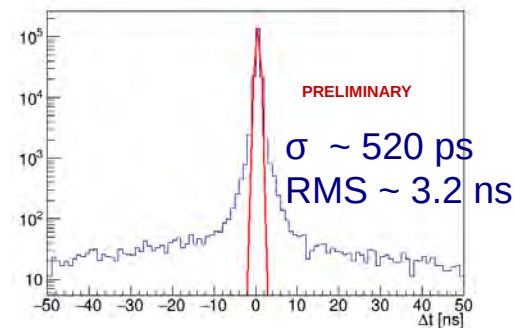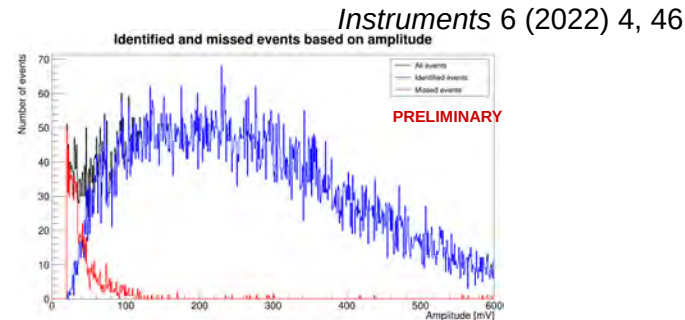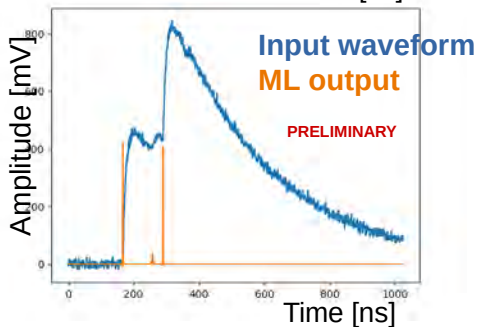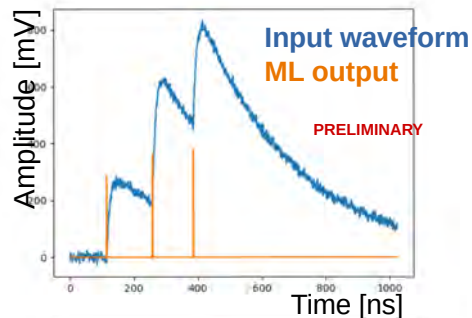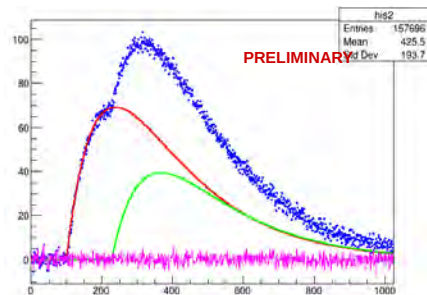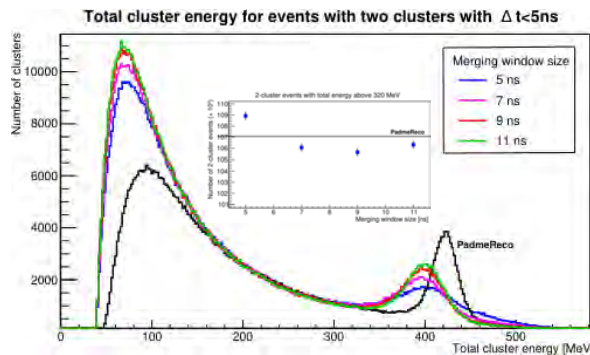


# $e^+e^- \rightarrow \gamma\gamma$ events

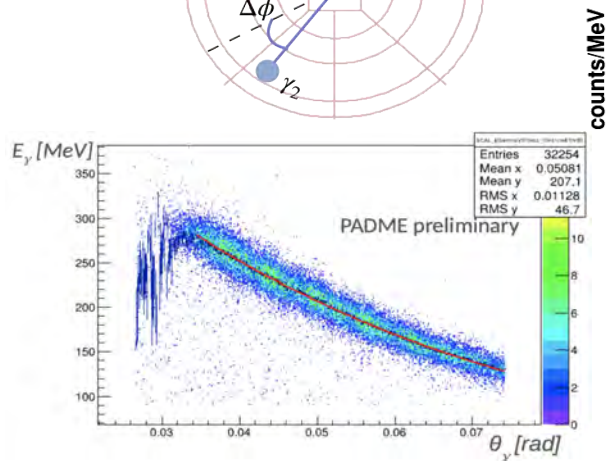

Tag photons selection

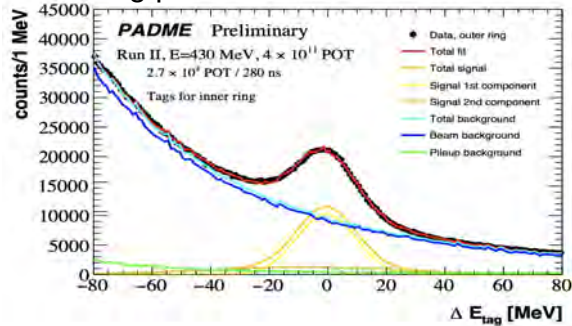


Probe photons

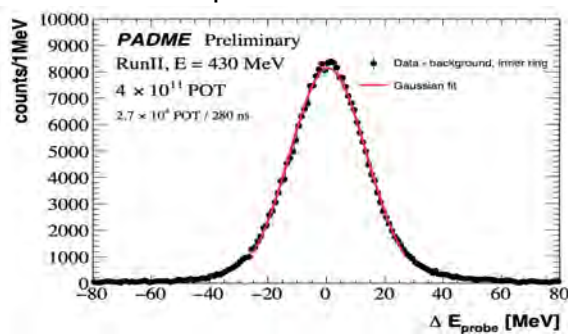




## $e^+e^- \rightarrow \gamma\gamma$ cross section

- Below 0.6 GeV known only with 20% accuracy
- Can be sensitive to sub-GeV new physics (e.g. ALP's)
- Using 10% of Run II sample
- Tag-and-probe method on two back-to-back clusters
- Exploit energy-angle correlation

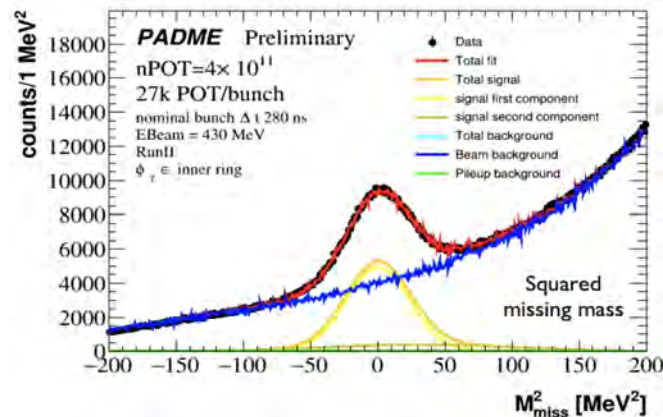




# $e^+e^- \rightarrow \gamma\gamma$ cross section

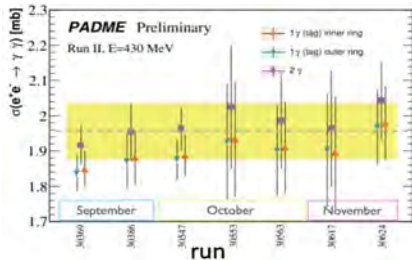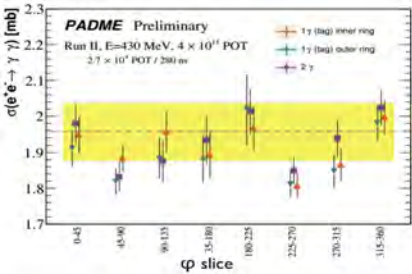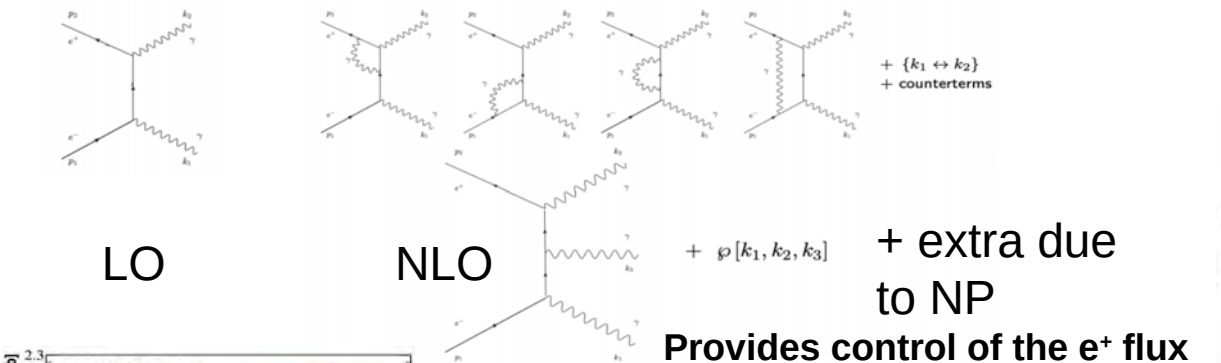


Systematic effect	Contribution $\delta$ [mb]
Detector response uniformity	0.020
Background modelling	0.047
Acceptance	0.025
n POT: target calibration	0.079
Electron density (target thickness)	0.020

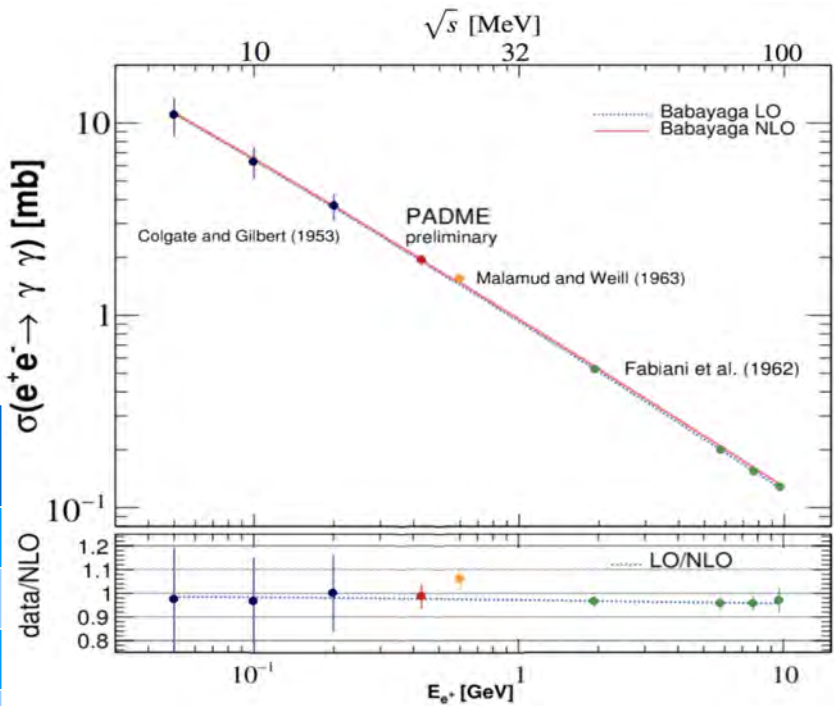


$$\sigma(e^+e^- \rightarrow \gamma\gamma(\gamma)) = 1.930 \pm 0.029(\text{stat}) \pm 0.099(\text{syst}) \text{ mb}$$


# Probing X17

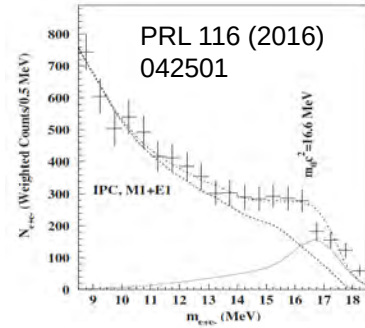


Phys.Rev.C 104, 044003 (2021)

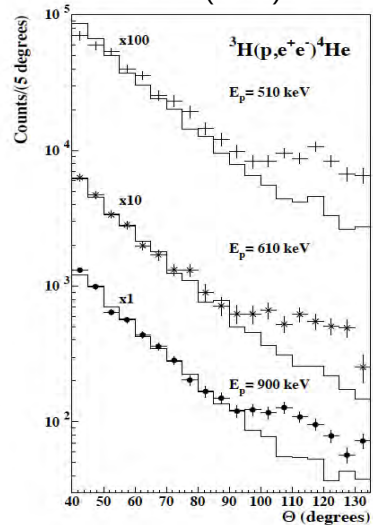

Phys. Rev. C 106, L061601 (2022)

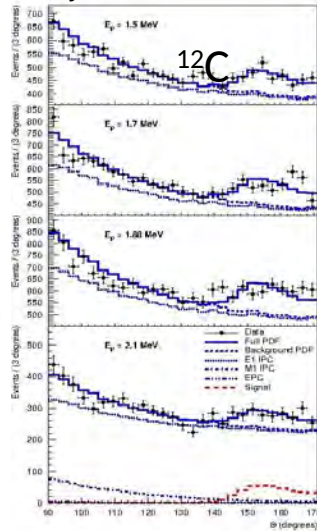


2022

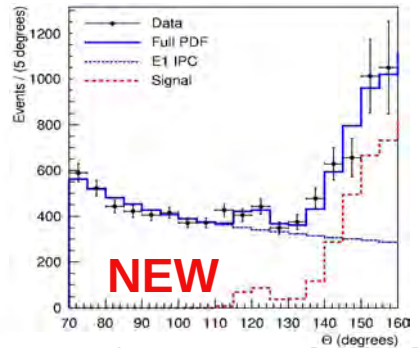


[arXiv:2308.06473](https://arxiv.org/abs/2308.06473) [nucl-ex]

Phys. Rev. D 101, 071101(R)

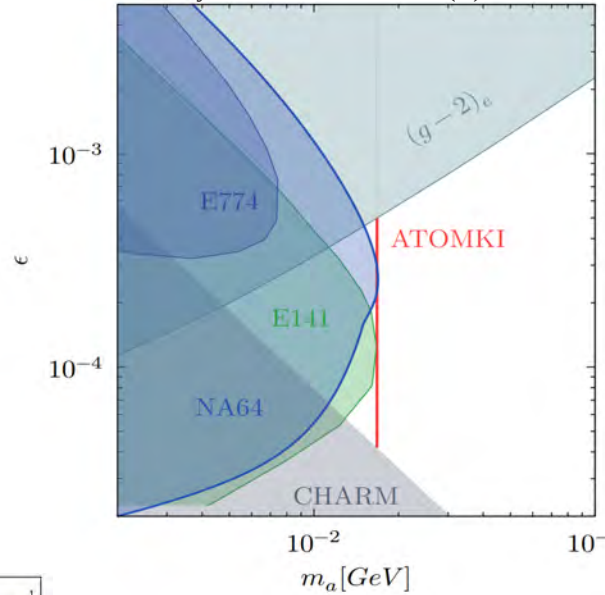



arXiv:2104.13342 [hep-ex]

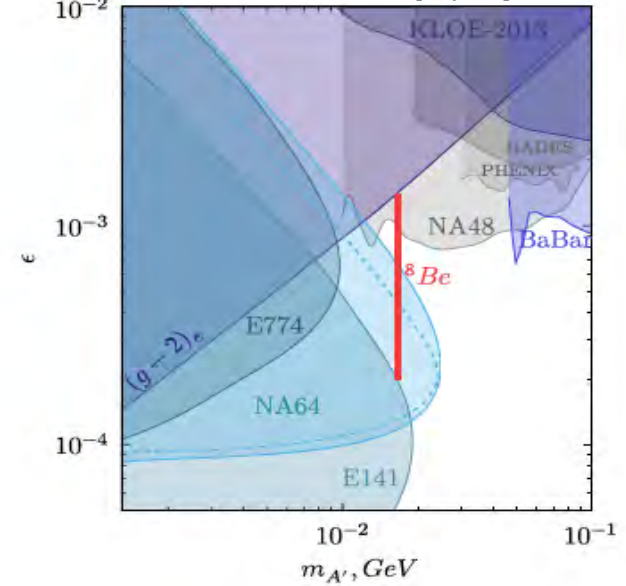


- Similar physics observables as in the  ${}^8\text{Be}$ ,  ${}^4\text{He}$  and  ${}^{12}\text{C}$  experiments
  - 2 leptons in the final state
  - Kinematics properties determined by the mass of the X particle (2 body decays)

# PADME strategy for X17

Cross section enhancement with the approach of the production threshold

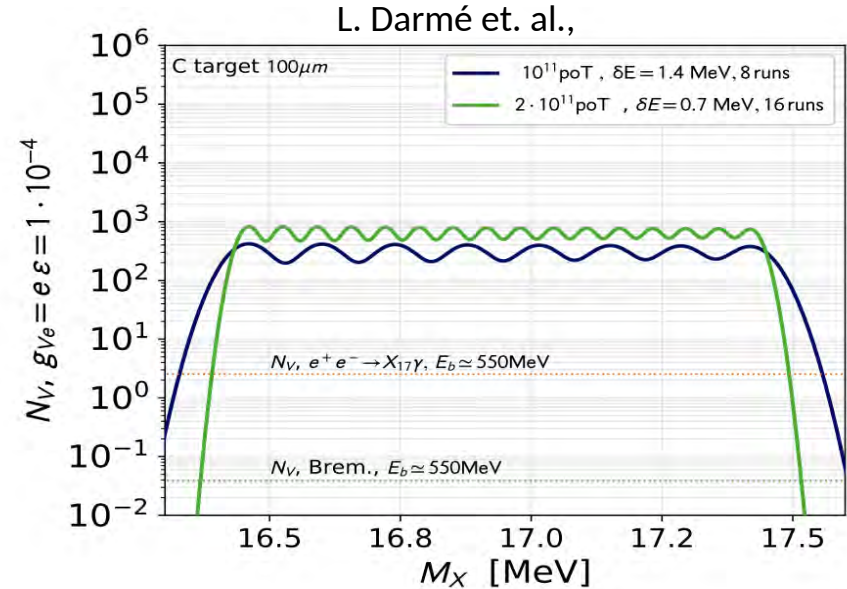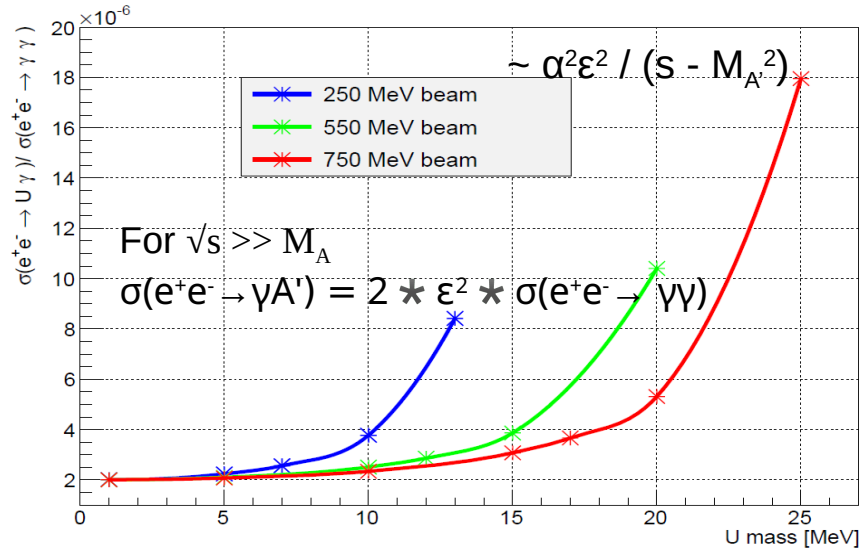




- Resonant production of X17
- Energy at resonance:  $\sim 283$  MeV: scan
- Need to measure the final state to reconstruct the invariant mass
  - Or change in cross section



$$\sigma_{\text{res}}(E_e) = \sigma_{\text{peak}} \frac{\Gamma_{A'}^2/4}{(\sqrt{s} - m_{A'})^2 + \Gamma_{A'}^2/4}$$

$$\sigma_{\text{peak}} = 12\pi/m_{A'}^2, \quad \Gamma_{A'} = \frac{1}{3}m_{A'}\epsilon^2\alpha$$

**$e^+e^- \rightarrow X17 \rightarrow e^+e^-$**

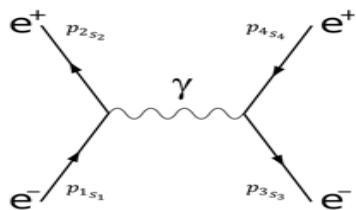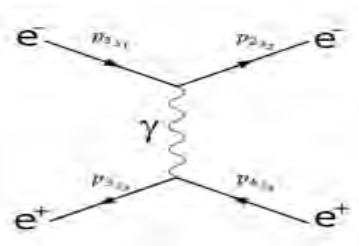


Bhabha scattering dominates the event rate in the background contribution for high  $P_{e^+}$

Resonant cross section significant  $\rightarrow$  X17 event yield

$$\mathcal{N}_{X17}^{\text{Vect.}} \simeq 1.8 \cdot 10^{-7} \times \left( \frac{g_{ve}}{2 \cdot 10^{-4}} \right)^2 \left( \frac{1 \text{ MeV}}{\sigma_E} \right)$$

$$\mathcal{N}_{X17}^{\text{ALP}} \simeq 5.8 \cdot 10^{-7} \times \left( \frac{g_{ae}}{\text{GeV}^{-1}} \right)^2 \left( \frac{1 \text{ MeV}}{\sigma_E} \right)$$

$\sigma_E$  - beam energy spread

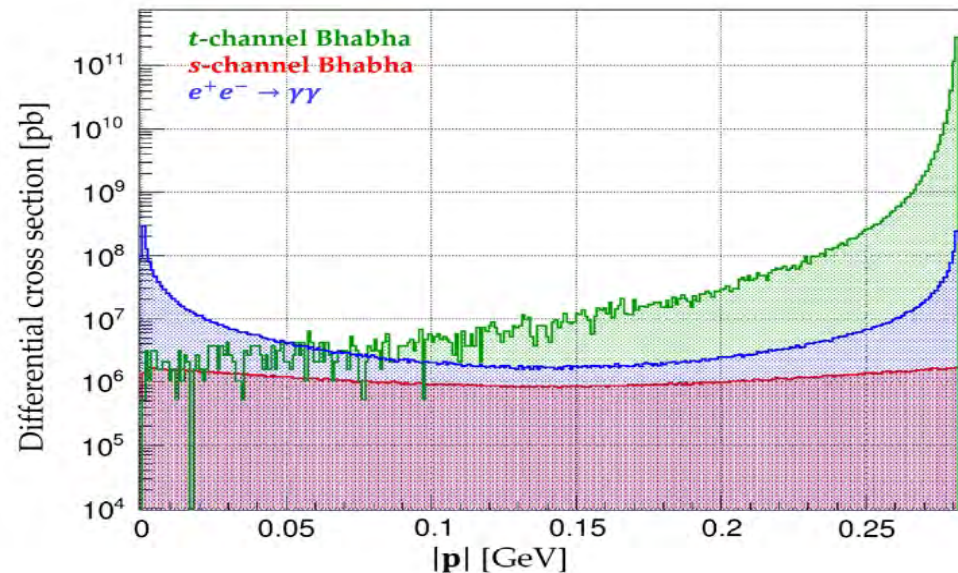


**Production of  $O(10^3)$  X17 events with  $10^{10}$  positrons on target**


**Change in  $\sigma_{\text{tot}}(e^+e^- \rightarrow e^+e^-)$**





# PADME RUN III

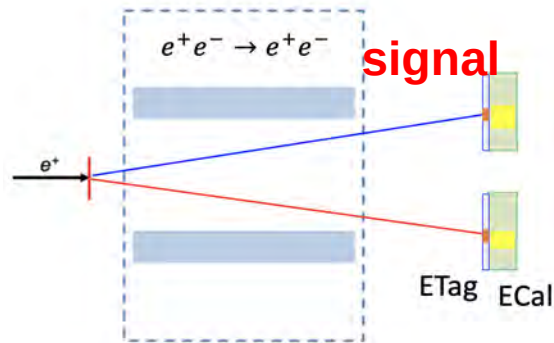

Running with no magnetic field in PADME dipole

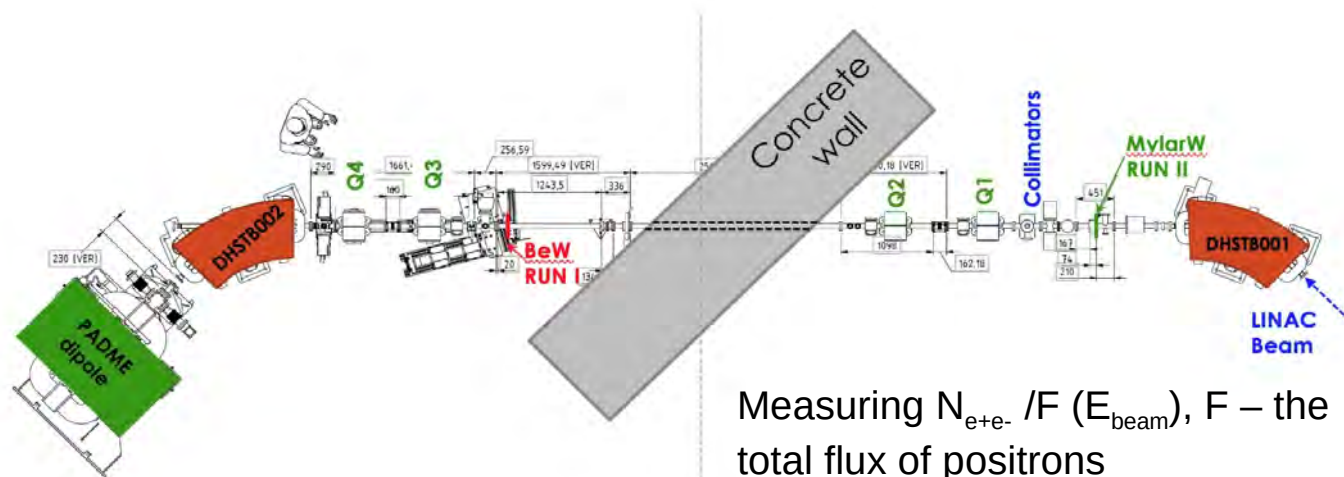


Measuring  $N_{e^+e^-} / F(E_{\text{beam}})$ ,  $F$  – the total flux of positrons

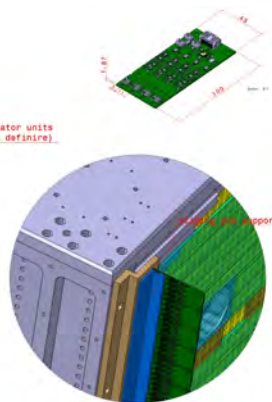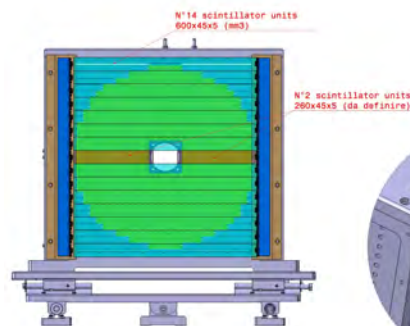



## Components in the analysis:

- **Signal selection & events identification**
  - Background contribution
- **Determination of the normalization**
  - PADME beam measurement
- **Expected signal yield**
  - “Theory” input: X17 line shape

# Signal selection: $N_{2cl} = N_{e+e-} + N_{\gamma\gamma}$

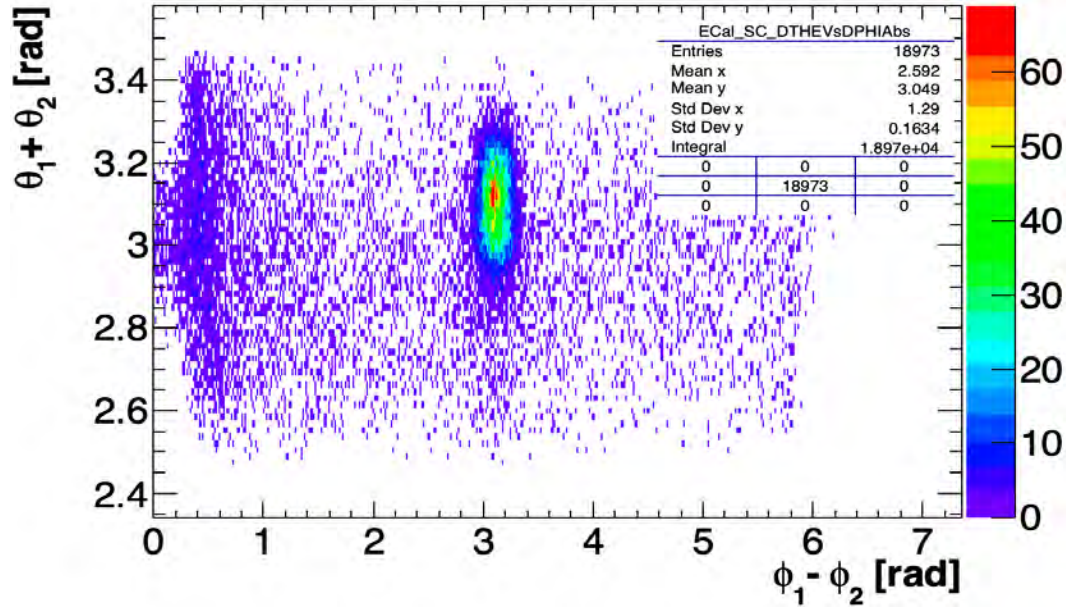


- ECal based: two in-time clusters with two body kinematics
- Background estimation:  $\sim 4\%$
- The measurement is  $N_{2cl}/\text{Flux}(E_{\text{beam}})$ 
  - $\text{Flux} = \text{PoT}$

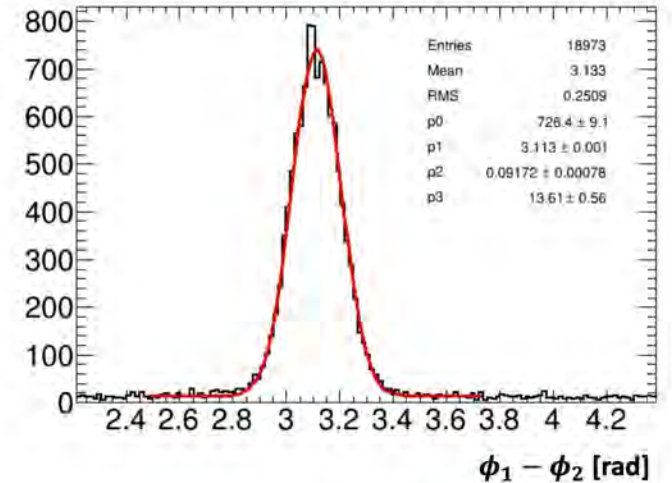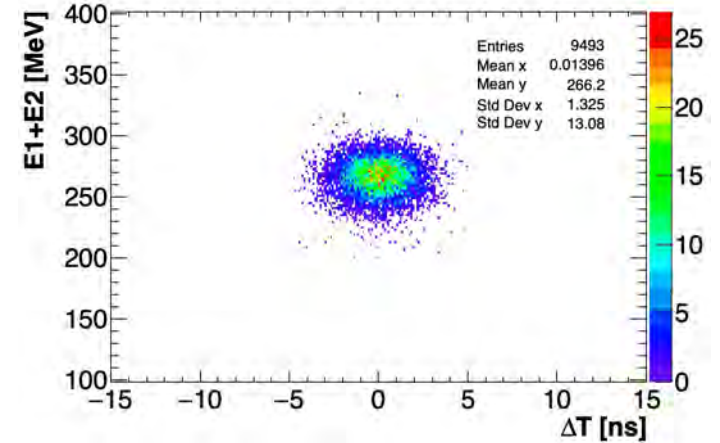


# Signal selection: selection efficiency

Cluster reconstruction efficiency:  
**TAG & PROBE with DATA**

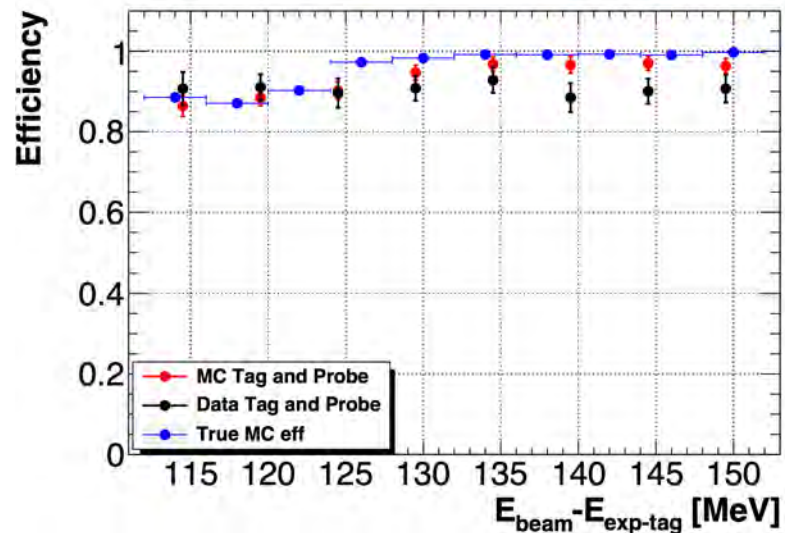

- Single hit identification threshold of 15 MeV
- Cluster reconstruction efficiency is stable over time
  - With the bad crystals excluded from the reconstruction


Geometrical efficiency (acceptance)

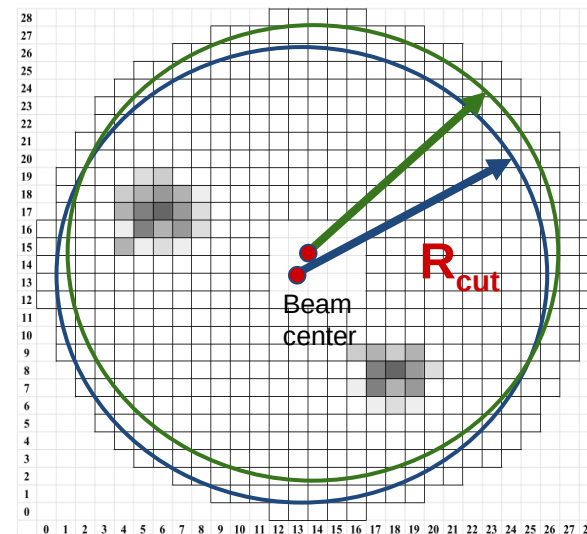

- Dominated by the cut on the outer radius of a cluster in the calorimeter
- Beam center drift limits the maximal  $R_{\text{cut}}$


# Event selection and beam position monitoring

Timepix 3 array

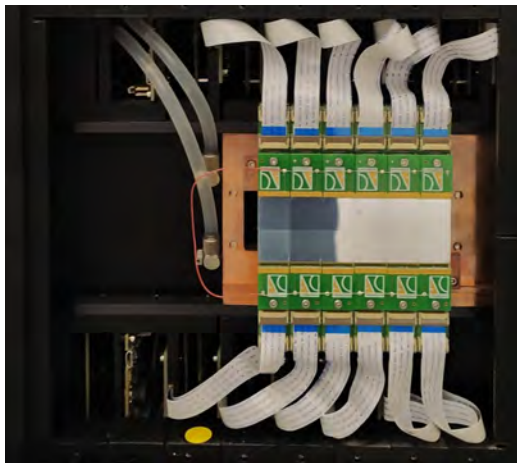


- Matrix of 2 x 6 Timepix3 detectors
  - each 256x256 pixels
- Operated in 2 modes:
  - image mode, integrating
  - streaming mode, feeding ToT and ToA for each fired pixel



COG at the ECal front face from 2 cluster events

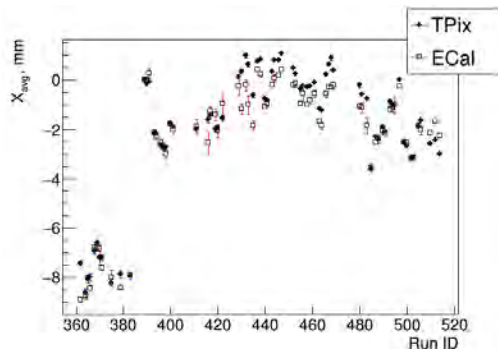

Movement within 10 mm

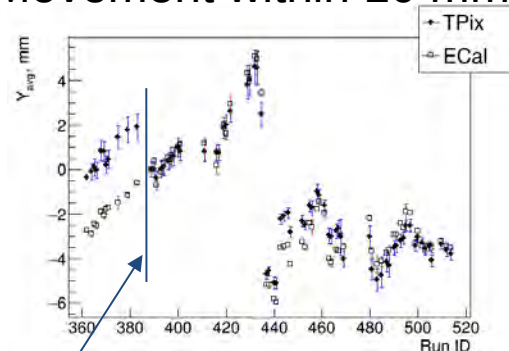


Timepix was moved by 1.8 mm


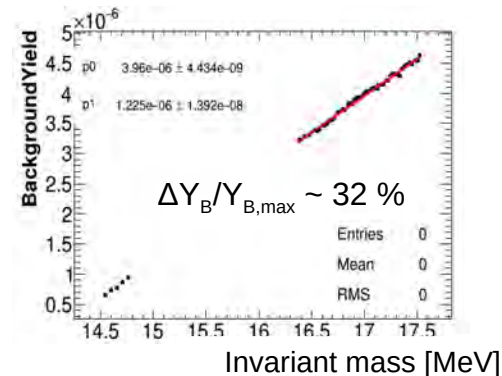
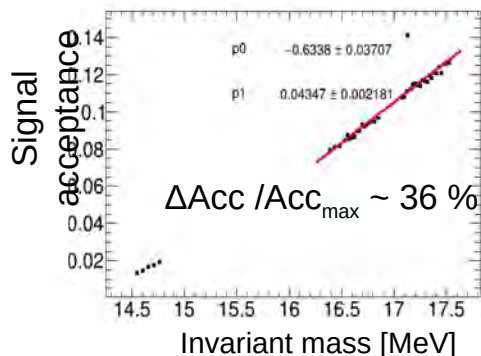





# Positron flux measurement

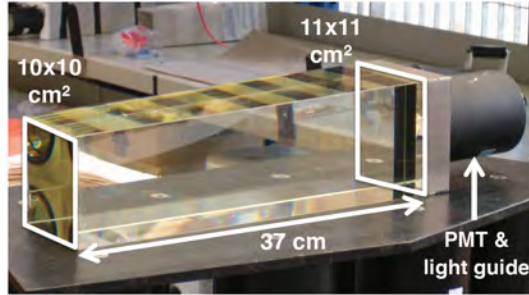

- PoT is primarily measured by an OPAL lead glass block downstream of the setup
- Additional detectors to control the PoT systematics
  - and to derive correction factors
- Several testing campaigns
  - A few positrons -> clear 1e, 2e, etc. peak identification
  - O(2000) PoT - cross-calibration with the BTF FitPix

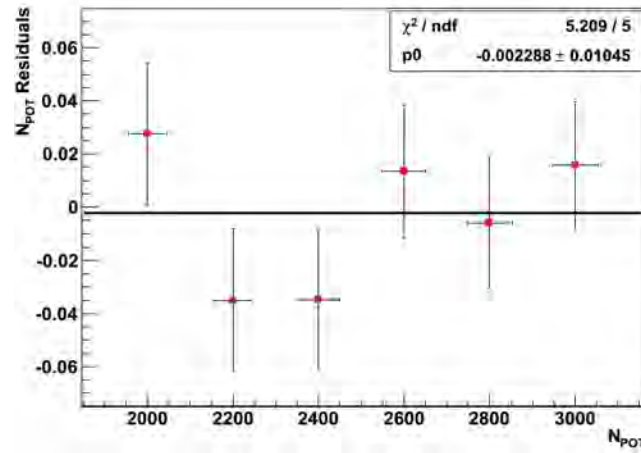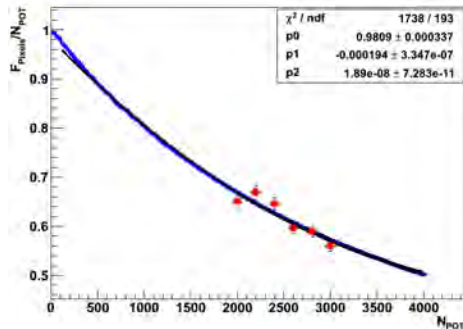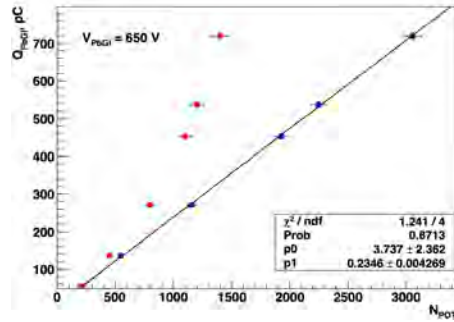


- Higher energy runs
  - control of the NPoT systematics
  - 2 clusters selection stability

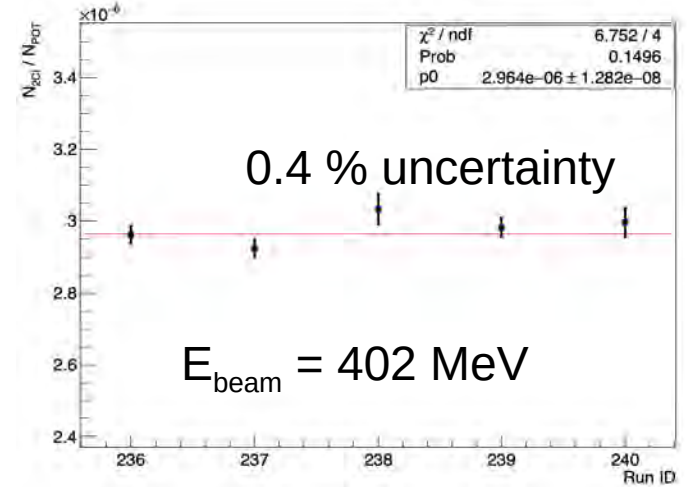

- Validation of the toy MC (and  $F_{\text{pixel}}$  correction factor) with an independent measurement from BTF luminometer
- Correction uncertainty - of the order of 1 %
  - Common to all the measurements

# Sensitivity estimation

- Sensitivity depends on S/B and the uncertainty on the background determination
  - Statistical ( $N_B$ ), 47 points with  $O(10^{10})$  PoT,  $\Delta E = 0.75$  MeV
  - Systematics (e.g.  $N_{\text{poT}}$ )
  - Background:  $N_B \sim 45000$  events per point
  - Signal acceptance

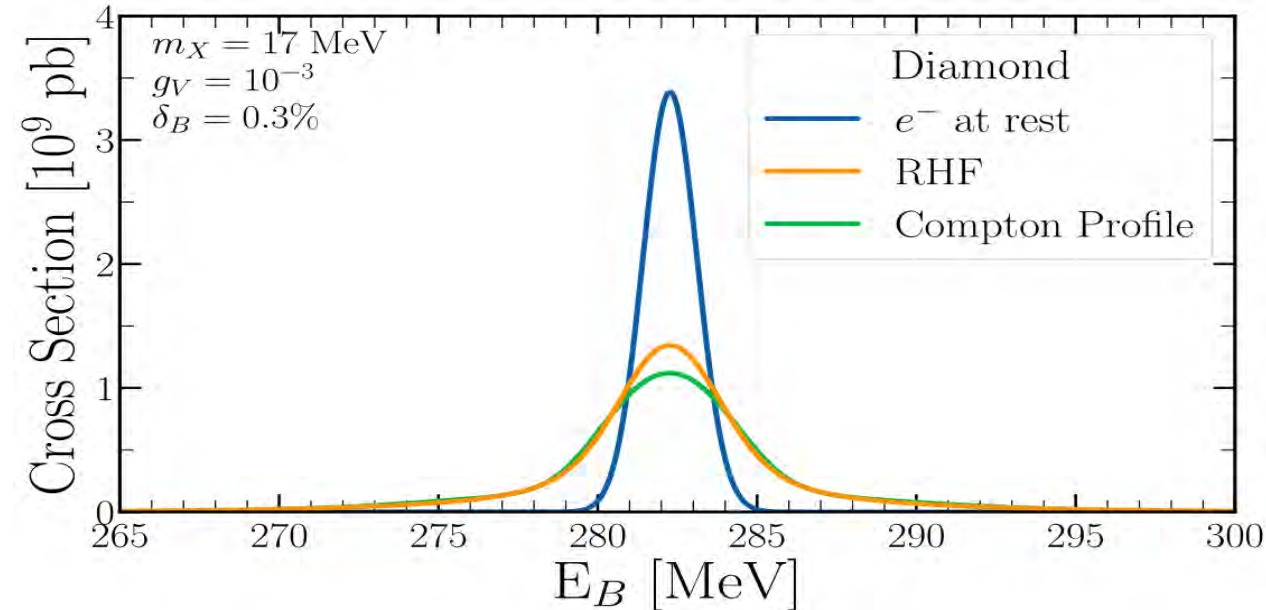


## Sources of systematics

- Relative PoT estimation  $O(0.5\%)$
- Acceptance 0.75%
- Beam energy spread 0.05 %
- Signal shape uncertainty
- Beam
- Time dependent ECal efficiency
- Beam energy uncertainty - controlled by Hall probes  $< 10^{-3}$
- ECal calibration

## Normalization systematics


- absolute PoT - 5 %

# PADME MC sensitivity estimate for RUN III

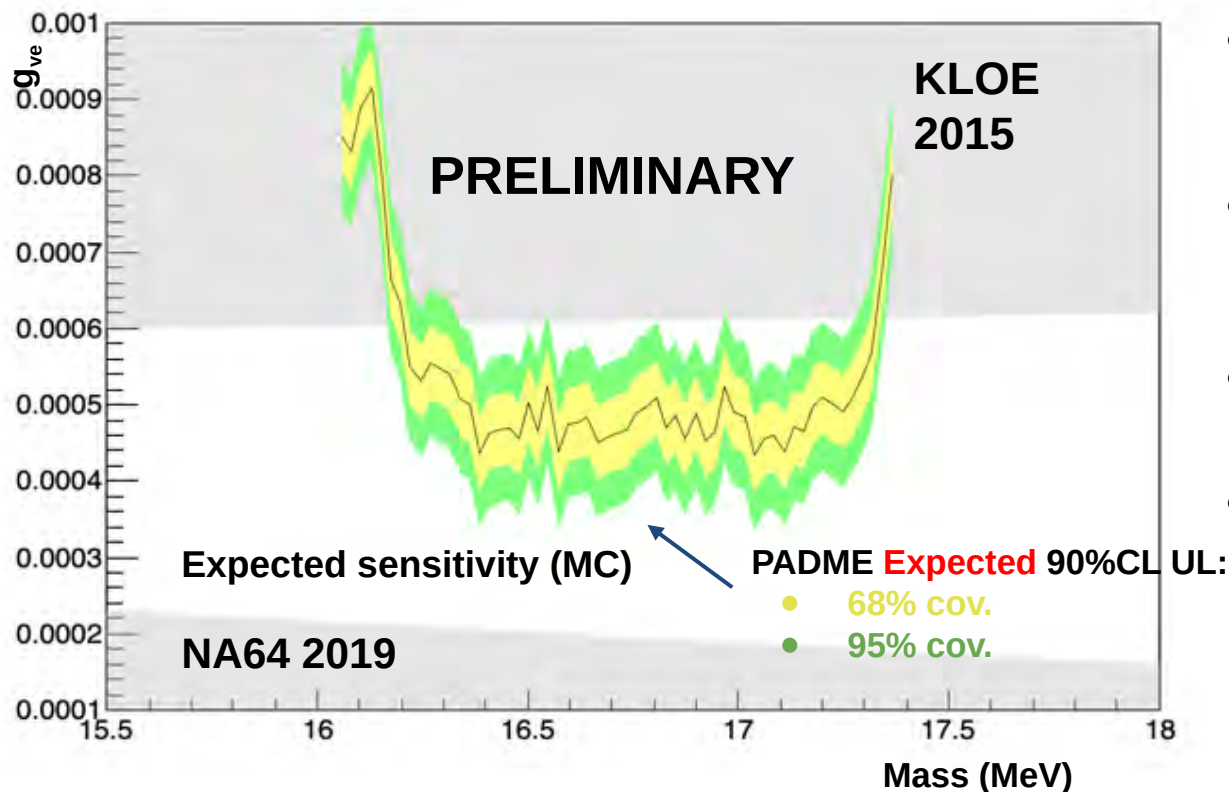

- Expected 90% CL upper limits are obtained with the CLs method
  - modified frequentist approach, LEP-style test statistic
- Likelihood fits performed for the separate assumptions of signal + background vs background only
 
$$Q_{\text{statistics}} = -2 \ln (L_{s+b} / L_b)$$
- Pseudo data (SM background) is generated accounting for the expected uncertainties of nuisance parameters + statistical fluctuations
- 150 Nuisance parameters:
  - POT of each scan point
  - Common error on POT (scale error)
  - Signal efficiency for each scan point
  - Background yield for each scan point
  - Signal shape parameters: signal yield @ a given X17 mass and  $g_{ve}$
  - Signal shape parameter: beam-energy spread




# Strategy for PADME Run IV: $N_{e^+e^-}/N_{\gamma\gamma}$

- The results from PADME RUN III will be dominated by PoT systematics, two clusters acceptance acceptance systematics  
 Exploit a different normalization channel which could possibly cancel part of the systematic effects
- Natural candidate:  $e^+e^- \rightarrow \gamma\gamma$ 
  - Same 2 body kinematics: similar ECal illumination, systematics due to bad ECal crystals largely cancels
- Back on the envelope estimation: need knowledge of  $N_{\gamma\gamma}$  at 0.5 % for each scanning point
  - $\sigma(e^+e^- \rightarrow \gamma\gamma)_{E=300 \text{ MeV}} \sim 2 \text{ mb}$ ,  $\text{Acc}(e^+e^- \rightarrow \gamma\gamma) \sim 10 \%$   $\Rightarrow$   $O(10k)$   $\gamma\gamma$  events per  $10^{10}$  PoT
    - Need 4 times higher statistics per scan point
  - Less scan points due to the widening of X17 lineshape because of the electronic motion
  - Higher intensity – by a factor of 2
- Need good separation between charged and neutral final states



# PADME tagger

- A novel micromegas readout plane suggested
  - Rhomboidal pads for X and Y direction, decrease the mutual capacitance
- Variable HV depending on the distance from the beam center
  - Low HV in the center, measure the beam multiplicity
    - Additional control on the PoT
  - Higher HV in periphery to ensure close to 100 % efficiency

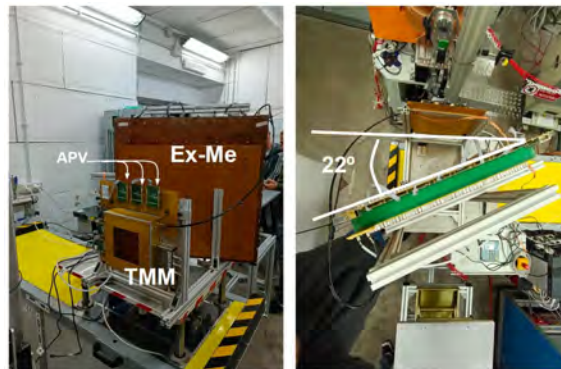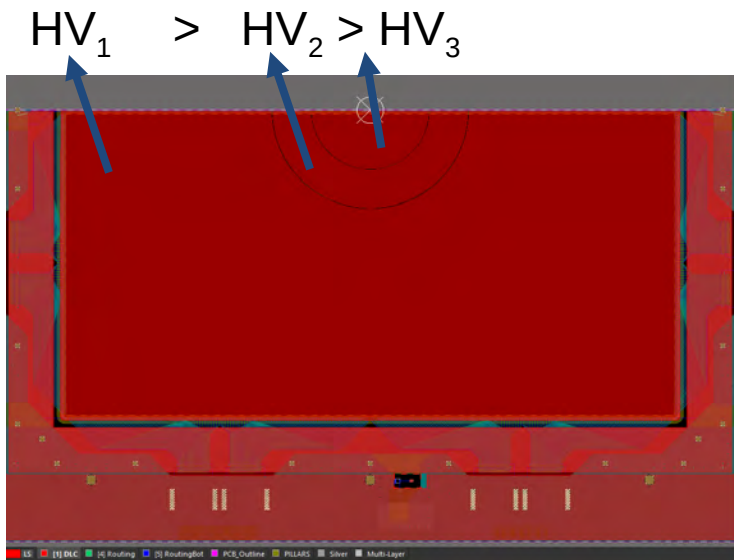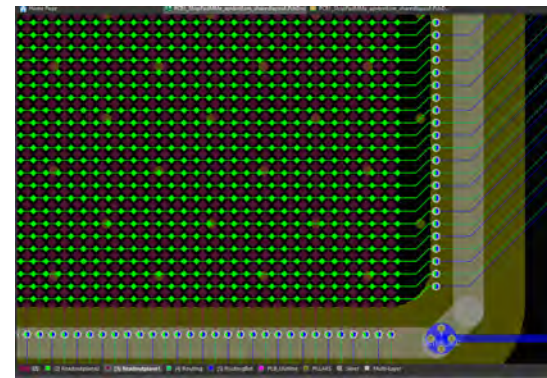

- Gas mixture:  
 $\text{Ar}:\text{CF}_4:\text{i-C}_4\text{H}_{10} = 88:10:2$
- Readout - SRS system with APV ASIC hybrid
  - An adapter card in preparation to allow APV25 to accept/record trigger signal
  - Timing and event matching

# Conclusions

- PADME Run II data used for  $e^+e^- \rightarrow \gamma\gamma$  cross section determination
- Dark photon analysis in RUN I/II data pushed forward thanks to application of ML methods for hit reconstructions in high rate environment
- X17 analysis advances by exploring the systematics
  - PoT determined with various cross-calibration procedures with uncertainty down to  $< 1 \%$
  - Signal acceptance and background estimation under control with systematics  $O(1\%)$
- A major improvement to PADME setup before RUN IV
  - Precise  $e^+e^- / \gamma\gamma$  discrimination with a new Micromegas tracker
  - **Allow probing the full unexplored region for the X17 allowed parameter space**